



CHOPIN Mini-ITX Tower

MAX

User Manual



Product Video Information



Chopin MAX Product Video



Chopin MAX Installation Guide Video

Product Story

Luxe Little Legend

The Chopin MAX is an ultra slim form factor case designed with the intention of being a multifaceted PC case with a small footprint. Uncompromised quality and functionality developed in a 3.3-liter chassis. Chopin MAX features a 4 mm brushed aluminium shell that completes a clean and sleek chassis frontal.



CHOPIN MAX

Specifications

InWin Chopin MAX Chassis

Model	Chopin MAX
Model Number	IW-CS-CHOPINMAXGRE-PS200W IW-CS-CHOPINMAXBLK-PS200W IW-CS-CHOPINMAXSIL-PS200W
Colors	Titanium Grey, Black, Silver
Case Type	Mini-ITX Tower
Materials	Aluminium, SECC
M/B Compatibility	Mini-ITX
I/O Ports	1 x USB 3.2 Gen 2x2 Type-C 2 x USB 3.2 Gen 1 HD Audio
CPU Heatsink Height	Up to 54 mm
Internal Drive Bays	2 x 2.5" (H 9.5 mm Max.)
Power Supply Compatibility	InWin 200W 80 PLUS Gold PSU Included
Product Dimensions (L x W x H)	217 x 84 x 244 mm 8.54 x 3.3 x 9.6"
Package Dimensions (L x W x H)	270 x 120 x 276 mm 10.6 x 4.72 x 10.8"
Net Weight	2.2 kg / 4.85 lbs
Gross Weight	2.5 kg / 5.5 lbs

* InWin's products comply with RoHS regulations.

* Specifications may vary based on different regions.



CHOPIN
max




InWin 200W 80PLUS GOLD PSU

Model	IP-AD200C7-2	
Total Power	200W	
Material	SECC	
Type	ITX	
PFC	Active PFC	
Efficiency	80 PLUS Gold	
MTBF (Hours)	> 100,000	
AC Input	100 – 240 Vac. 50-60Hz	
Operating Temperature Range(° C)	0~40° C	
Full Protection	OVP / UVP / SCP / OPP	
Safety Certifications	TUV / cTUVus / BSMI / CB / CE / FCC / EAC / RCM / CCC	
Dimensions (L x W x H)	52 x 40 x 170 mm 2.05 x 1. x 6.7"	
Warranty	3 Years	
Connectors	20+4 Pin Motherboard	1
	8 (4+4) Pin CPU	1
	8 (6+2) Pin PCI-E	0
	4 Pin Peripheral	0
	SATA (90 Degree)	1
	Floppy	0

* InWin's products comply with RoHS regulations.

* Specifications may vary based on different regions.




Package Contents



Accessories Bag

Hexagon Head Screw x 5	2.5" SSD Screws x 8
	
SATA Power Y Splitter Cable x 1	Side Panel Mylar (Red, Green, Blue, Orange) x 4 Set
	




Case Structure

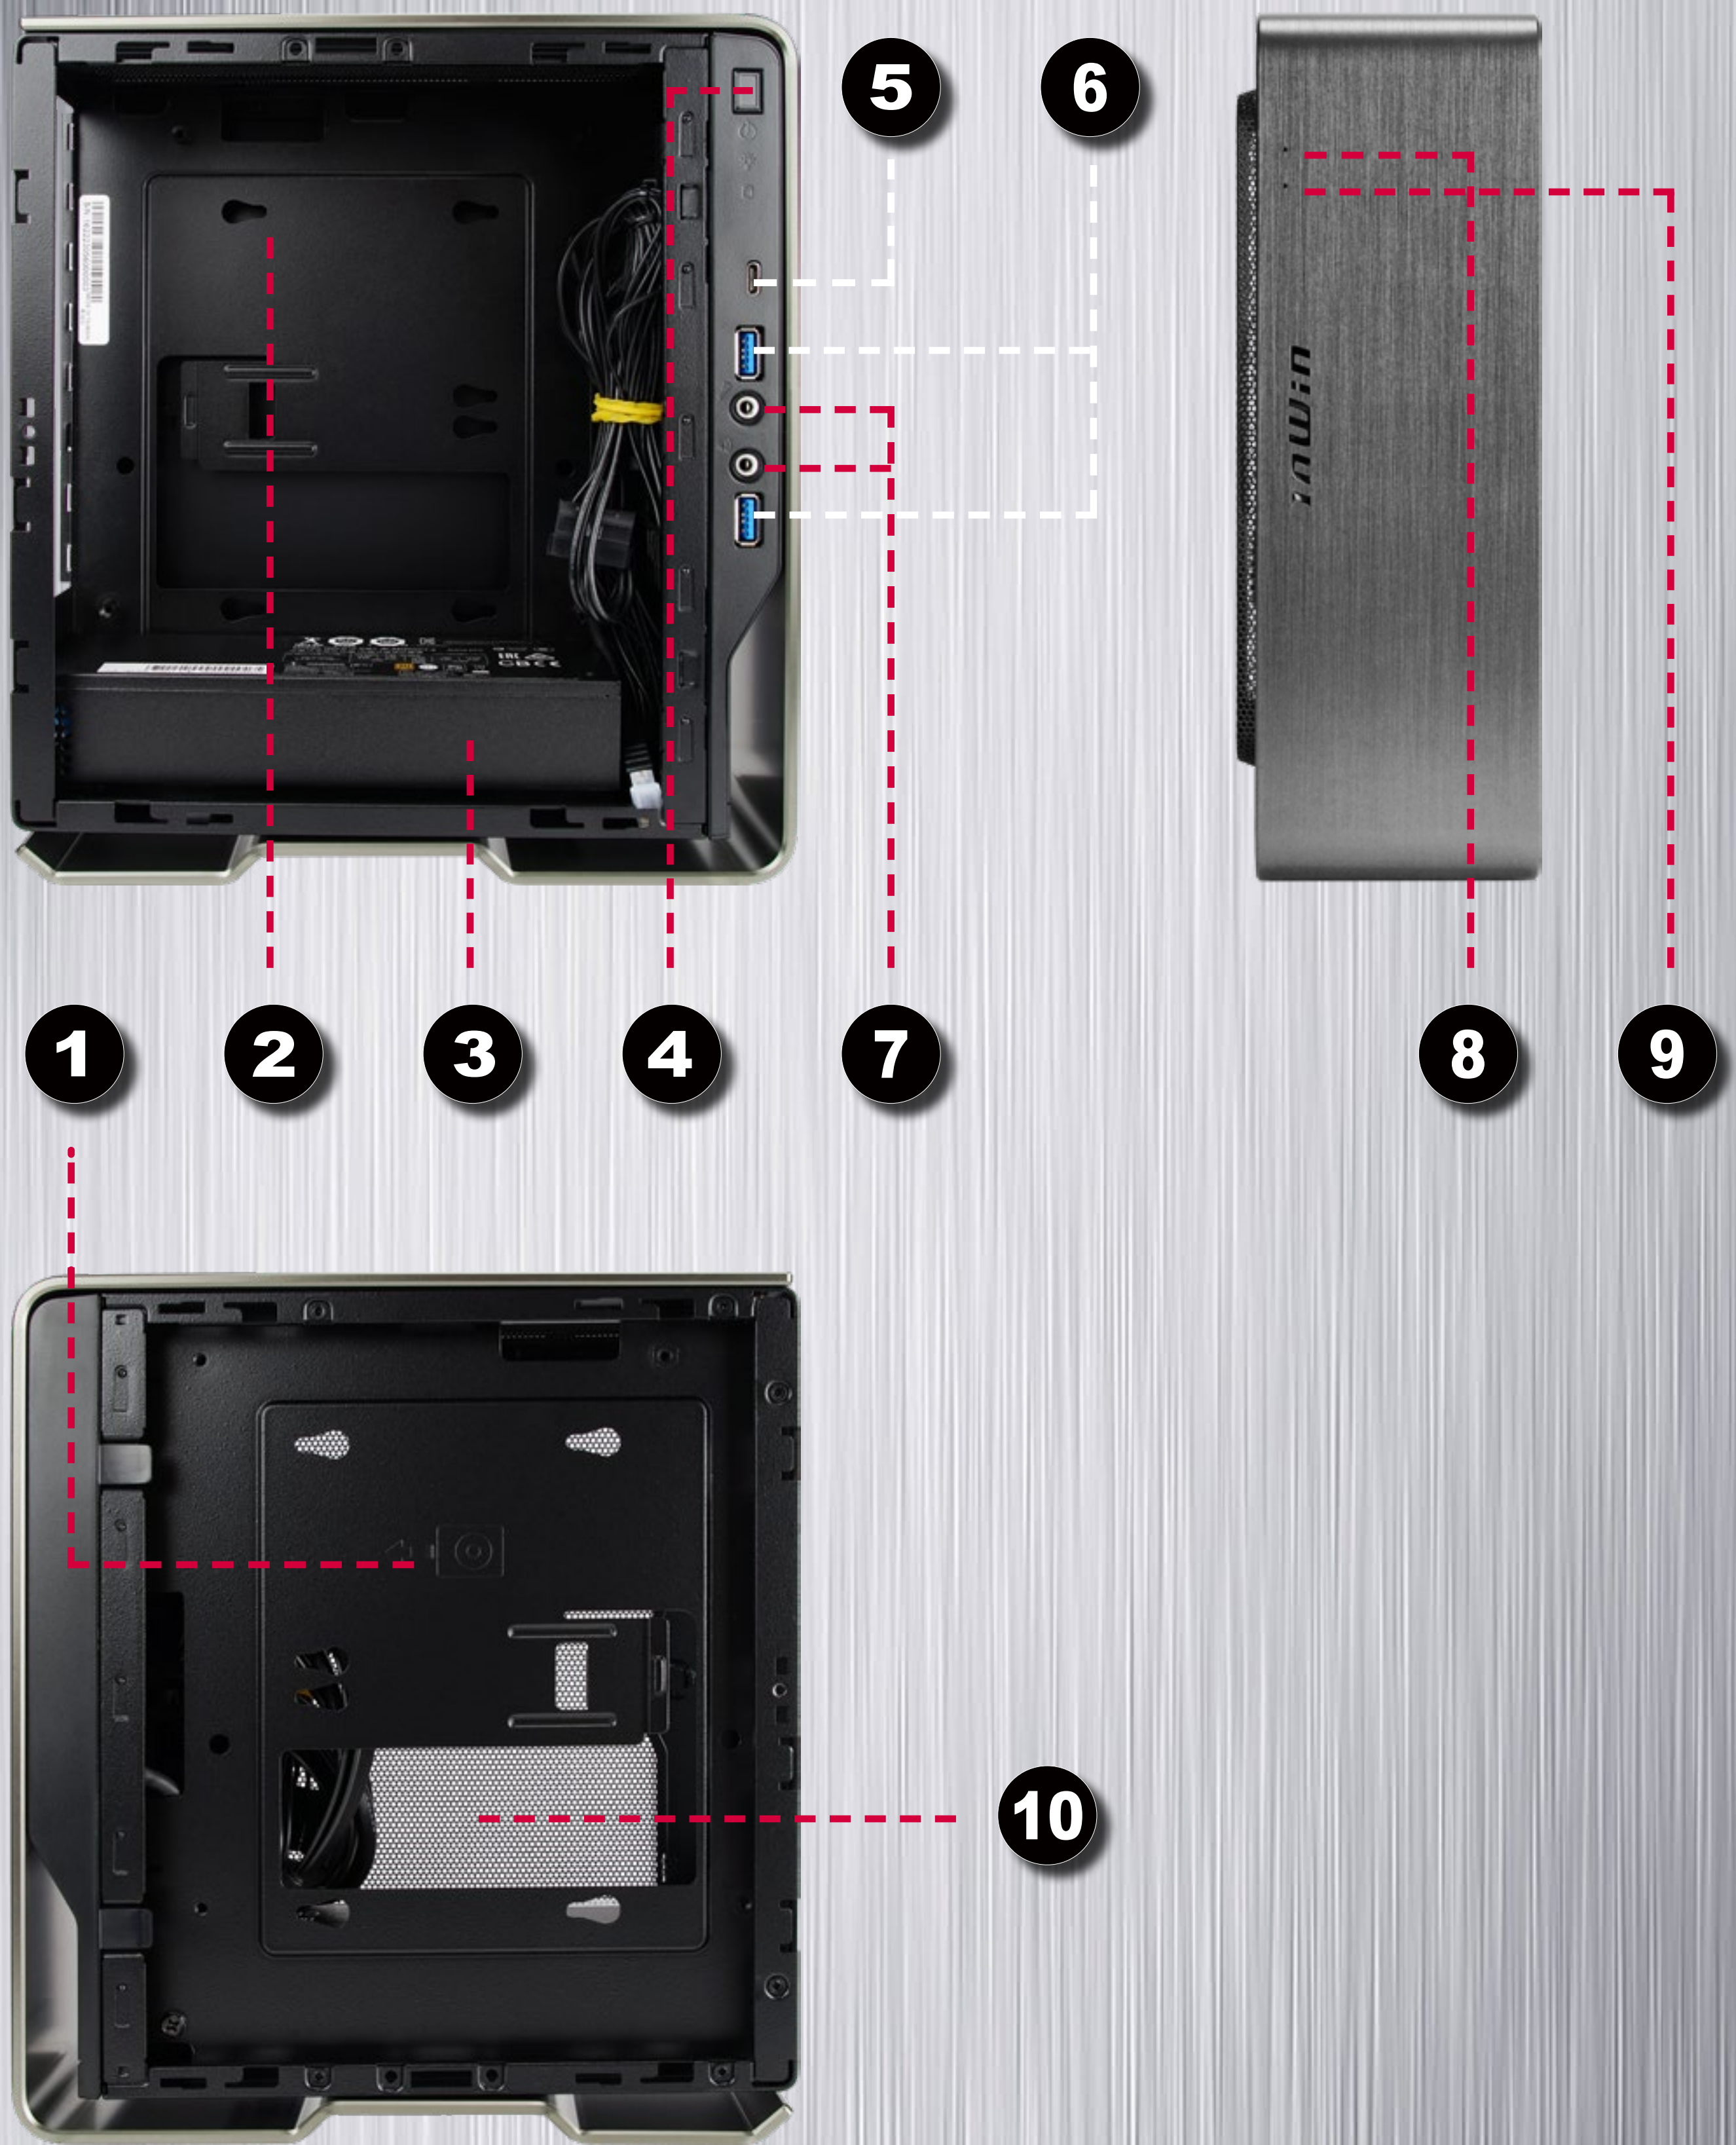

1	2.5" Drive Bay
2	Motherboard Mounting Area
3	200W 80 PLUS Gold PSU Included
4	Power Button
5	USB 3.2 Gen 2x2 Type-C
6	USB 3.2 Gen 1
7	Audio Ports (Earphone and Microphone)
8	Power Indicator
9	HDD Indicator
10	M.2 SSD Installation Cut-Out Hole


Connection Cables

I/O Wires x1

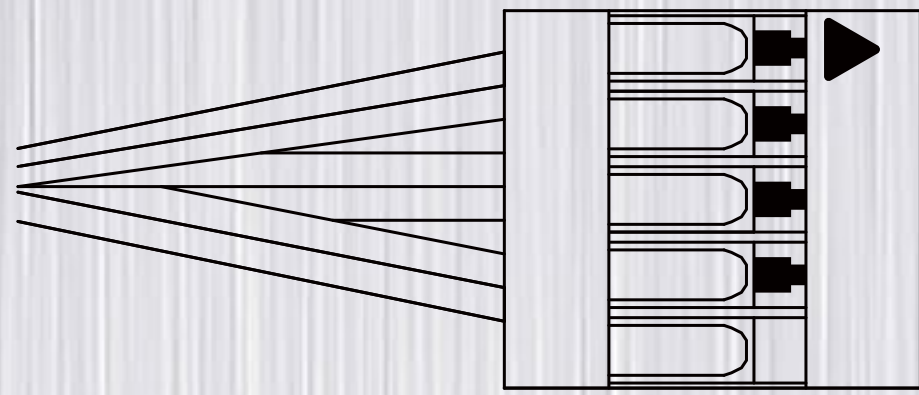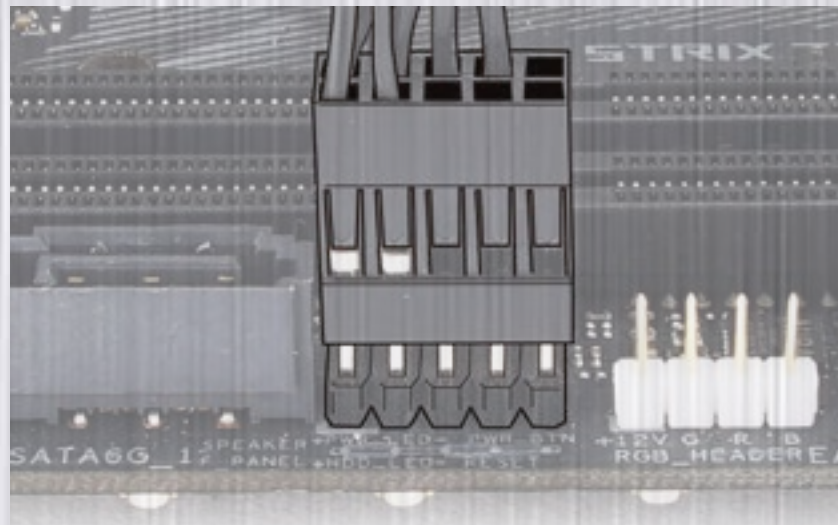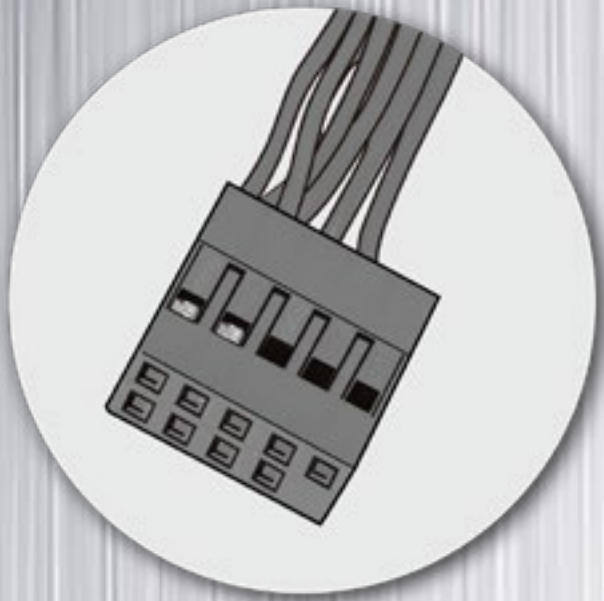


Black(P_LED) 1		2 Black (HDD)
Black(P_LED) 3		4 Black (HDD)
Black(P_SW) 5		6 NC
Black(P_SW) 7		8 NC
Key 9		10 NC

HD Audio Header x1

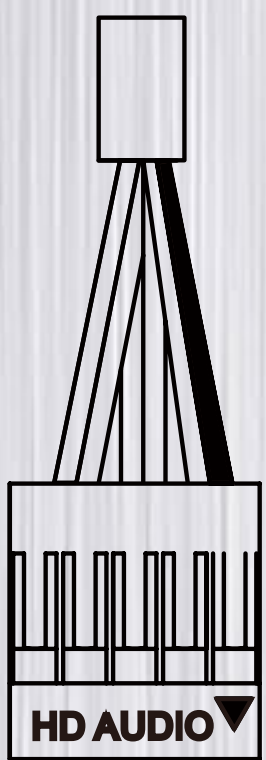


PORT2_L	BLUE	10			9	BROWN	SENSE2_R
SENSE_SEND	PURPLE	8			7		KEY
PORT2_R	YELLOW	6			5	WHITE	SNAS1_R
PORT1_R	RED	4			3	ORANGE	PRESENCE#
PORT1_L	GREEN	2			1	BLACK	GND

USB 3.2 Gen 1 x1

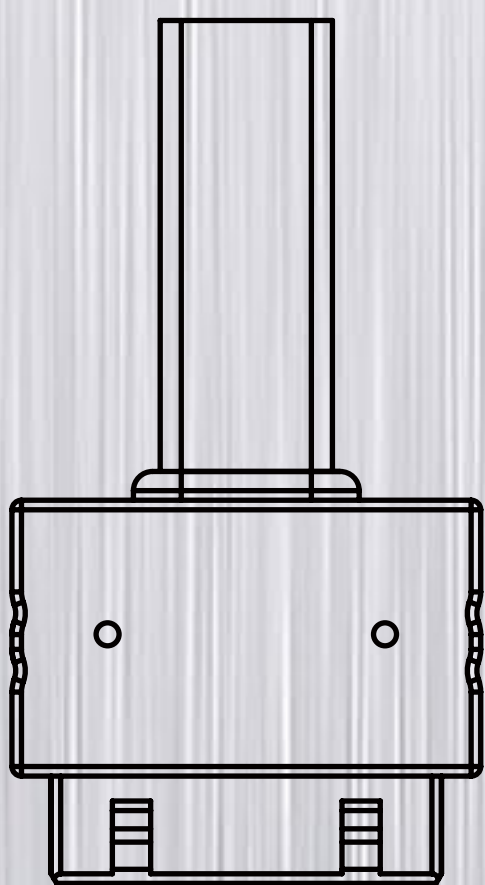

	PIN#1						PIN#19
Vbus	1						19 Vbus
IntA_P1_SSRX-	2						18 IntA_P2_SSRX-
IntA_P2_SSRX+	3						17 IntA_P2_SSRX+
GND	4						16 GND
IntA_P1_SSTX-	5						15 IntA_P2_SSTX-
IntA_P1_SSTX+	6						14 IntA_P2_SSTX+
GND	7						13 GND
IntA_P1_D-	8						12 IntA_P2_D-
IntA_P1_D+	9						11 IntA_P2_D+
ID USBOC-	10						
			PIN#10				PIN#11

USB 3.2 Gen 2x2 Type-C x1

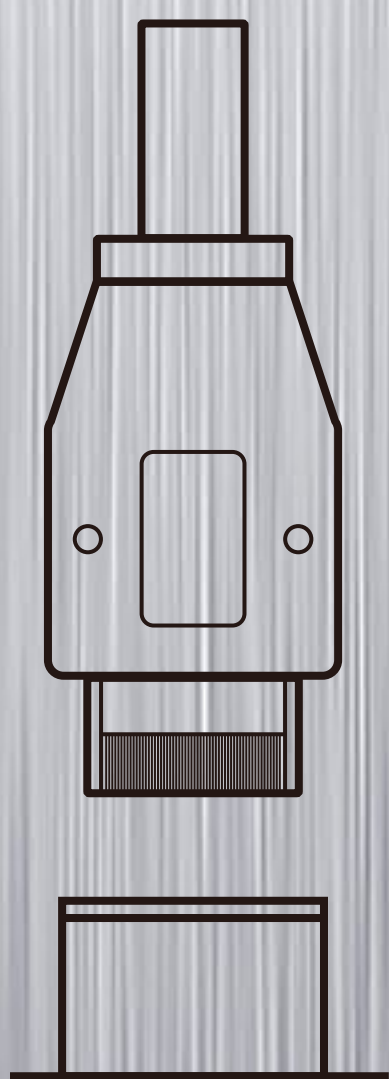

Notices and Warranty

■ Notices

1. Please follow the user manual for installation guidelines.
2. When installing computer components, please use the antistatic precautions to prevent ESD (electrostatic discharge) damage. This can cause injury to the installer and/or damage to the machine. Incorrect installation may burn your motherboard and other system components.
3. To avoid any damages, please do not use this product for any other purpose than its intended use.
4. Any modifications may damage the product.
5. Please remove all internal devices before shipping or moving.
(Including power supply, hard drives, CD-ROM, motherboard and CPU, etc)
6. When storing the case, please keep this product away from high temperatures. Keep away from machines such as heaters that might cause high temperatures.
7. For more technical support, please visit the InWin Forum at <https://forum.in-win.com/>

■ Warranty

1. For more detailed warranty information, please visit the InWin retail website at www.in-win.com
2. The actual product is subject to change without prior notice.
In Win Development Inc. reserves the right to make any final modifications.



CHOPIN^{max}



CHOPIN MAX



CONTEMPORARY & INNOVATIVE
www.in-win.com